

IDG851-LT001




M2M Multi-Cellular Gateway

Feature Sets:

- Smart Business solution for Retail POS and self-service stations, like ATM, vending machine, and digital signage applications.
- Equip with two single-SIM LTE modules with failover and load balance function.
- 4*GE LAN port with tag based and port based VLANs easily to group control and relocate traffic pattern.
- Fully protocol with NAT/Routing/IPv6 compatible with most IP network.
- IPSec, OpenVPN, PPTP, and L2TP VPN support up to 16 concurrent tunnels with max 100Mbps throughput (IPSec).
- Firewall with SPI and IPS function prevent hacker attacking and enhance network efficiency.
- SNMP, Telnet CLI, and TR-069 for administrator to manage system.
- QoS and Bandwidth management for optimal bandwidth usage.
- Seamless power failover between redundant DC 12V~48V wide range power input.

Connection Diagram:

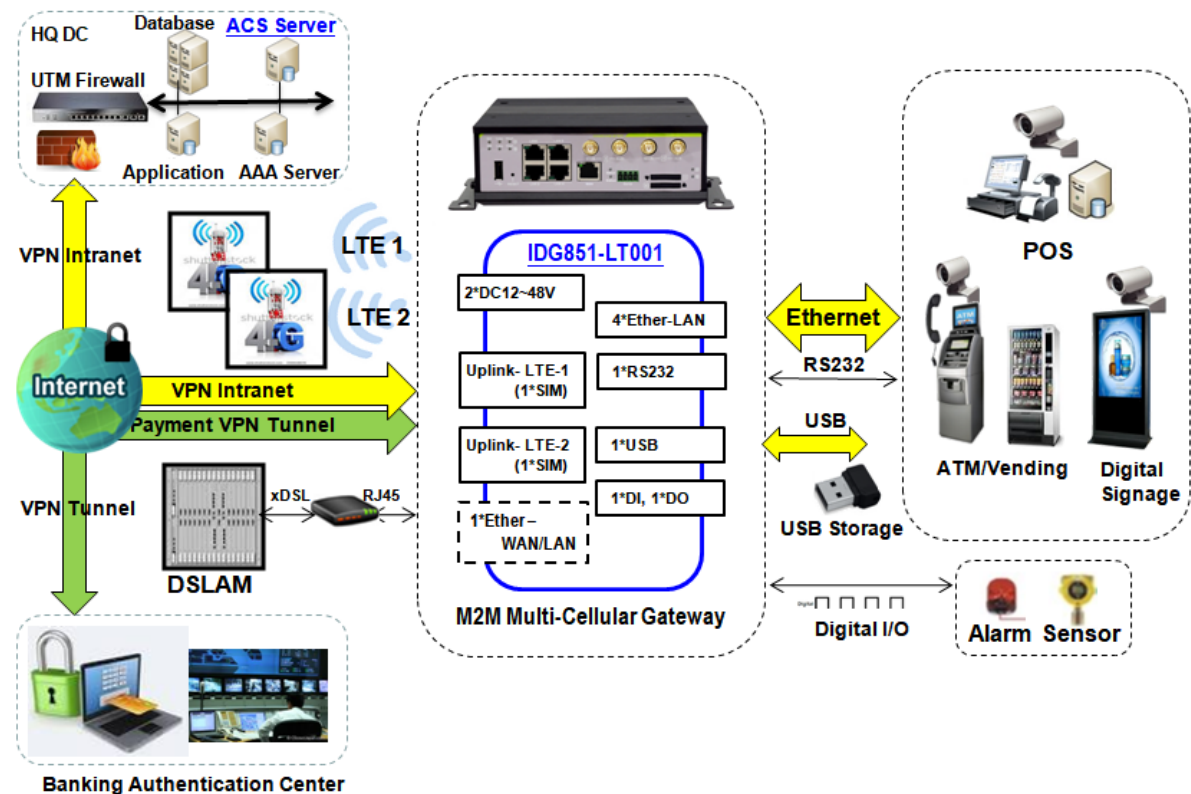

Specifications¹:

Device Interfaces

Uplink:	2*LTE module (1+1 *SIM), 1*RJ45 GE (configurable)
LAN-RJ45:	4(5)*RJ45 GE
Comm. Bus:	1*RS232 (4-pin Terminal Block)
I/O:	1*DI ("Logic 0": 0~2V, "Logic 1": 5V~30V), 1*DO (Relay Mode, up to 30V / 1A)
Log Storage:	1*USB 2.0
Cellular Band ² :	LTE: 800/900/1800/2100/2300/2600 MHz, UMTS: 850/900/1900/2100 MHz GPRS/EDGE: 850/900/1800/1900 MHz
Antenna ³ :	4* SMA Jack (Female) for external LTE Ant.
Power Source ³ :	Dual DC 12V~48V

WAN Functions

WAN:	Multiple WANs, Failover / Load Balance
Cellular:	2G/3G/LTE, Dual Module, IP Pass-through
Ethernet:	Dynamic IP, Static IP, PPPoE, PPTP, L2TP
IPv6:	Dual Stack, 6-in-4, 6-to-4

Basic Functions

Ethernet:	LAN IP, Subnet Mask
VLAN:	Port-based, Tag-based
Port Forwarding:	Virtual Server/ Computer, DMZ Host, PPTP/L2TP/IPSec Pass-through
Routing:	Static, Dynamic: RIP1/RIP2, OSPF, BGP
QoS:	Policy-based Bandwidth Control and Packet Flow Prioritization

Object Definition

Scheduling:	Time Schedule List
Grouping:	Host Grouping List
Ext. Server:	Email, Syslog, RADIUS, LDAP, FTP
Certificate:	My Certificate, Trusted Certificate, Issue Certificate

Field Communication

Virtual COM:	RFC2217, TCP Client, TCP Server, UDP
--------------	--------------------------------------

Security

VPN Tunneling:	IPSec, OpenVPN, PPTP, L2TP, GRE; Tunneling with Full Tunnel, Tunnel Failover
VPN Scenario:	Site to Site, Site to Host, Host to Site, Host to Host, Hub and Spoke, Dynamic VPN
Firewall:	SPI Firewall with Stealth Mode, IPS
Access Control:	Packet Filter, URL Blocking, MAC Filter

Service

Cellular Toolkit:	SMS, Data Usage, SIM PIN, USSD, Network Scan
Event Handling:	Managing / Notifying Events; DI, DO, SMS, Syslog, SNMP Trap, Email Alert, Reboot

Administration

Config. & Mgmt.:	Web, Telnet CLI, Command Script, TR-069, SNMPv3 standard & AMIT MIB
System Op.:	MMI, System Info., System Time / Log, Backup & Restore, Reboot & Reset
FTP:	FTP Server, User Account
Diagnostic:	Packet Analyzer, Diagnostic Tools

Dimension

Device (LxWxH):	160x125x62mm (w/o mounting kit) 200x125x65mm (with Bracket kit) 62x135x160mm (with DIN Rail kit)
-----------------	--

Environment

Operation Temp. ⁴ :	-30 °C ~ 70 °C
Storage Temp.:	-40 °C ~ 85 °C
Humidity:	10% ~ 95% (non-condensing)

Accessory

Package Content	1*Device, 1*Terminal Block (8-pin for DC Power & DI/DO), 1* Terminal Block (4-pin for serial port), 1*DIN Rail Bracket, 2*Mounting Brackets, 1*Screw Bag, 1*CD (User Manual);
-----------------	--

Certification

Approval / Certificate	CE
Standards & Regulation	EMI: EN 55032: 2015 +AC: 2016 Class B EN 61000-3-2:2014 EN 61000-3-3:2013 EMS: EN 55024:2010+A1:2015 EN 61000-6-2:2005+AC:2005 IEC 61000-4-2(ESD) Level 4 IEC 61000-4-3(RS) Level 3 IEC 61000-4-4(EFT) Level 4 IEC 61000-4-5(Surge) Level 3 IEC 61000-4-6(CS) Level 3 IEC 61000-4-8(PFMF) Level 4 Radio: EN 301 489-1/-7/-17/-24/-52, EN 300 328 V2.1.1 EN 301 893 V1.8.1, EN 50385 Safety: EN 60950-1

1. Specifications are subject to change without prior notice.
2. Supported frequency band is dependent upon regional hardware version.
3. PWR Adapter & Ext. LTE antennas are not included in standard package.

4. 3G/4G performance will be degraded if device's ambient temperature is above 60 °C.

AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068

Web: <http://www.amit.com.tw> Email: sales@amit.com.tw

No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)

IDG851-LT001 Datasheet, V1.7c