

VHG760-0T021




In-Vehicle Cellular Gateway

Feature Sets:

- **In-Vehicle Applications:** LTE connection, GNSS fleet tracking, and Wi-Fi Internet access for passengers.
- **Dual SIM:** location free reliable connectivity with multi-ISP fail-over.
- **Versatile Cellular:** Uplink settings by service provider; data usage control.
- **Complete Network:** Built-in NAT/Port Forward/Routing/IPv6 are compatible with existing IP networks.
- **Wi-Fi Hotspot:** IEEE 802.11 b/g/n compliant; multiple SSIDs; captive portal.
- **High Security:** Various VPN protocols & scenario; built-in Firewall & IPS; ACL & Authentication by MAC/User to enhance access security.
- **Flexible Administration:** Web UI for basic settings; programmable CLI and Command Script for advanced configuration; NMS based on SNMP or TR-069; configurable SMS administration.
- **Smart Event Handling:** Mechanism to manage pre-defined events by administrator. Events triggered by System/Interface status change, and notification sent by SMS, SNMP trap, or e-mail.
- **Ruggedized Design:** Vibration and shock proof, extended operational temperature range, variable power input installation.

Connection Diagram:

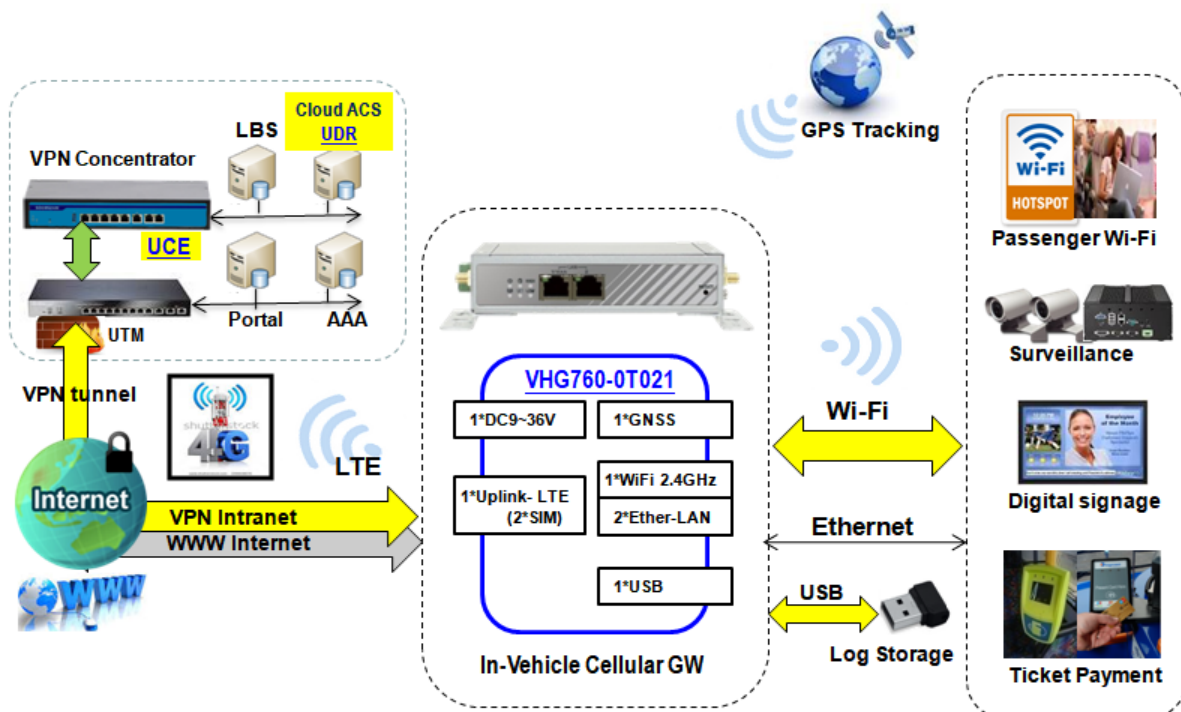



Specifications¹:

Device Interfaces

Uplink: 1*LTE module (2*micro-SIM)
LAN-RJ45: 2*RJ45 FE
LAN-WiFi: 802.11n 2T2R (2.4GHz)
GNSS: 1*embedded GPS Receiver
Cellular Band²: LTE: 800/900/1800/2100/2300/2600 MHz,
UMTS: 850/900/1900/2100 MHz
GPRS/EDGE: 850/900/1800/1900 MHz
Antenna: 2*3dBi LTE ant.
2*5dBi WiFi ant.
1* SMA Jack(F) for GNSS ant.
Power Source: DC 9V~36V

WAN Functions

WAN: 3G/4G WAN
Cellular: 2G/3G/LTE, IP Passthrough

Basic Functions

Ethernet: LAN IP, Subnet Mask
WiFi Operation: AP Router, WDS, WDS Hybrid Modes
WiFi Security: WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, 802.1x
VLAN: Port-based, Tag-based
Port Forwarding: Virtual Server/ Computer, DMZ Host,
Special AP & APG, VPN Pass-through
Routing: Static, Dynamic: RIP1/RIP2, OSPF, BGP
QoS: Policy-based Bandwidth Control and Packet
Flow Prioritization

Object Definition

Scheduling: Time Schedule List
Grouping: Host Grouping List
Ext. Server: Email, Syslog, RADIUS, LDAP, FTP
Certificate: My Certificate, Trusted Certificate,
Issued Certificate

Security

VPN Tunneling: IPSec, OpenVPN, PPTP, L2TP, GRE;
Tunneling with Full Tunnel, Tunnel Failover
VPN Scenario: Site to Site, Site to Host, Host to Site, Host
to Host, Hub and Spoke, Dynamic VPN
Firewall: SPI Firewall with Stealth Mode, IPS
Access Control: Packet Filter, URL Blocking, MAC Filter
Content Filter, Application Filter
Authentication: Captive Portal

Service

Cellular Toolkit: SMS, Data Usage, SIM PIN, USSD,
Network Scan
Event Handling: Managing / Notifying Events; SMS,
Syslog, SNMP Trap, Email Alert, Reboot
Location Tracking: GNSS, Track Viewer

Administration

Config.& Mgmt.: Web, Telnet CLI, Command Script, TR-069,
SNMPv3 standard & AMIT MIB
System Op.: MMI, System Info., System Time / Log,
Backup & Restore, Reboot & Reset
Diagnostic: Packet Analyzer, Diagnostic Tools

Dimension

Device (LxWxH): 131x99x31mm (w/o mounting kit)
167x99x39mm (with mounting kit)

Environment

Operation Temp.³: -30 °C ~ 70 °C
Storage Temp.: -40 °C ~ 85 °C
Humidity: 10% ~ 95% (non-condensing)

Accessory

Package Content
1*Device,
2*Cellular Antenna (3dBi), 2*WiFi Antenna (5dBi),
1*Terminal Block (2-pin for DC Power),
2*Mounting Brackets, 1*Screw Bag,
1*RJ45 Cable, 1*CD (User Manual)

Certification

Approval / Certificate
CE, E-Mark
Standards & Regulation
EMI: EN 55032: 2015 +AC: 2016 Class B
EN 61000-3-2:2014,
EN 61000-3-3:2013,
CISPR 25 Radiated Emission (ECE R10)
EMS: EN 55024:2010+A1:2015
EN 61000-6-2:2005+AC:2005
IEC 61000-4-2(ESD) Level 4
IEC 61000-4-3(RS) Level 3
IEC 61000-4-4(EFT) Level 4
IEC 61000-4-5 (Surge) Level 3
IEC 61000-4-6 (CS) Level 3
IEC 61000-4-8(PFMF) Level 4
ISO 7637-2(2004) (ECE R10)
Radio: EN 301 489-1/-7/-17/-24/-52,
EN 300 328 V2.1.1,
EN 50385
Safety: EN 60950-1

1. Specifications are subject to change without prior notice.
2. Supported cellular frequency depends on regional hardware version.
3. 3G/4G and WiFi performance will be degraded if device's ambient temperature is above 60°C.

AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068
Web: <http://www.amit.com.tw> Email: sales@amit.com.tw
No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)

VHG760-0T021 Datasheet V1.7c